ELECTRONIC TRANSFORMER COMPATABILITY

• VIEW SELL SHEET

BRAND	MODEL	LOAD	1#	2#	3#	4#	5#	6#
HATCH	VS12-60WD	60W	OK	OK	OK	OK	OK	OK
	VS12-60W	60W	OK	OK	OK	OK	OK	OK
	VS12-75W	75W	OK	OK	OK	OK	OK	OK
	RS12-60M	60W	OK	OK	OK	OK	OK	OK
	RS12-60M	60W	OK	OK	OK	OK	OK	OK
	RS12-30M	30W	OK	OK	OK	OK	OK	OK
	RS12-60M-LED	60W	Noise	Noise	Noise	Noise	Noise	Noise
	RS12-15M-LED	15W	Noise	Noise	Noise	Noise	Noise	Noise
	RS1230MLED	30W	Noise	Noise	Noise	Noise	Noise	Noise
WAC	EN-1260-R-AR	60W	OK	OK	OK	OK	OK	OK
	EN-1275-R-AR	75W	OK	OK	OK	OK	OK	OK
	HHT-602-BK	50W	OK	OK	OK	OK	OK	OK
	EN-12100-R-AR	100W	OK	OK	OK	OK	OK	OK
LIGHTECH	LVT-60	60W	OK	OK	OK	OK	OK	OK
	LET60	60W	OK	OK	OK	OK	OK	OK
PROGRESS	P8560-31	60W	OK	OK	OK	OK	OK	OK
TRAN	QT10		OK	OK	OK	OK	OK	OK
B+L TECHNOLOGIES	FX95100	75W	OK	OK	OK	OK	OK	OK
JUNO	R731BL	50W	OK	OK	OK	OK	OK	OK
ELCO	ET526	50W	OK	OK	OK	OK	OK	OK
DALS	WH-601E6A-3B	60W	Incompatible	Incompatible	Incompatible	Incompatible	Incompatible	Incompatible
	WH-1501E	150W	Noise	Noise	Noise	Flicker/Noise	Flicker/Noise	Flicker/Noise
	WH-601E6A	60W	OK	OK	OK	OK	OK	OK
EUROfase	0069	105W	Noise	Noise	Noise	Noise	Noise	Noise
JESCO	AF-111	50W	Incompatible	Incompatible	Incompatible	Incompatible	Incompatible	Incompatible

LED DIMMERS COMPATIBILITY*

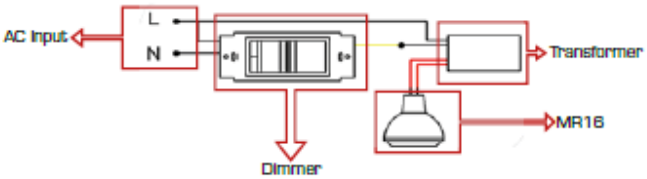

Note: Items 90700 and 90703 are compatible with some dimmers, they do not have the correct chip to be listed as dimmable.

TRANSFORMER BRAND	TRANSFORMER MODEL	DIMMER TYPE BRAND	DIMMER TYPE MODEL	1#	2#	3#	4#	5#	6#
WAC	EN-1260-R-AR	LUTRON	NELV-450	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure
			DVELV-300P	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure
			SELV-300P	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure
	EN-1275-R-ARM		AELV-600	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure
			NLV-600	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure
		LEVITON	6615-POW	OK	OK	Flicker	Flicker	Flicker	Flicker
	HHT-602-BK	LUTRON	NELV-450	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure
			DVELV-300P	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure
			SELV-300P	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure
			MAELV-600	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure
			NLV-600	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure
		LEVITON	6615-POW	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure	Start-up failure
	EN-12100-R-AR	LUTRON	NELV-450	OK	OK	OK	OK	OK	OK
			DVELV-300P	OK	OK	OK	OK	OK	OK
			SELV-300P	OK	OK	OK	OK	OK	OK
			MAELV-600	OK	OK	OK	OK	OK	OK
			NLV-600	OK	OK	OK	OK	OK	OK
		LEVITON	6615-POW	OK	OK	OK	OK	OK	OK
HATCH	VS12-60WD	LUTRON	NELV-450	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
			DVELV-300P	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
			SELV-300P	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
			VS12-75W	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
			MAELV-600	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker
			NLV-600	Flicker	Flicker	Flicker	Flicker	Flicker	Flicker